

DUDLEY **TURBO 88**®


2-PART W.C. SYPHON FOR EASY MAINTENANCE

NO NEED TO TURN OFF WATER SUPPLY

TDS 1311

UNIQUE MAINTENANCE FEATURES

- No need to dismantle cistern.
- Two parts separate easily for servicing.
- Fits 'SYVAC' Air Extractor for twin-trap syphonic W.C.'s.

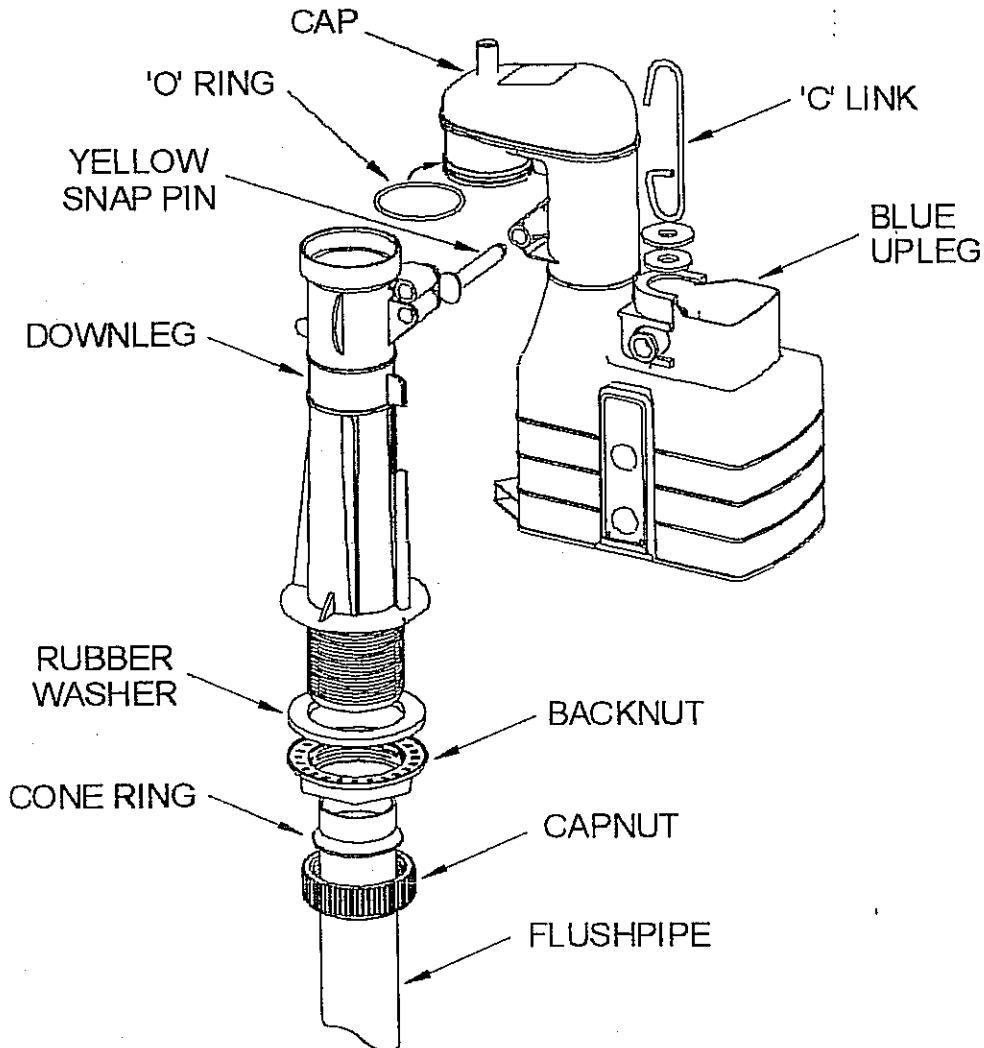

SERVICE INSTRUCTIONS

1. Obtain Dudley '**TURBO 88**' Spares Pack from Builders' Merchants & DIY Stockists.
2. Disconnect cistern lever.
3. Withdraw yellow pin 32mm (1¼"). Then pull up blue section.
4. Slide upwards & disengage from guide rib.
5. Remove piston to replace worn parts
(USE GENUINE 'DUDLEY' DIAPHRAGMS & WASHERS).
6. Check/replace 'O' ring to ensure good seal
(Do NOT use jointing compound or adhesive).
7. Replace all parts carefully - slide blue section down white guide rib & re-fit yellow pin firmly.

THOMAS DUDLEY LTD., DUDLEY, ENGLAND.

Copyright Designs 1985 - British Patents & Design Registration