



Applications

Vanity top/basin mounted electronic tap that is ideal for use in most commercial applications.

Water Saving


Delivering as little as 1 litre of water per visit. Supports BREEAM.

Features

- ~ Sleek minimalist design
- ~ Available in polished chrome or stainless steel finishes
- ~ Hygienic touch-free operation
- ~ Delivers cold or premixed warm water
- ~ Shuts off when hand is removed from in front of the sensor
- ~ Water delivery automatically stops after 90 seconds (can be adjusted)
- ~ Robust one piece brass body and vandal-resistant design
- ~ Must be installed with a thermostatic mixing valve for premixed water
- ~ Suitable for pressures of 0.5 - 8.0 bar. 8.0 + with a flow restrictor
- ~ 50mm - 300mm sensor range
- ~ Fail safe feature automatically closes the solenoid when power is cut or power is very low
- ~ Maximum temperature 70°
- ~ 6 litre per minute flow rate, others available.



Dimensional Data

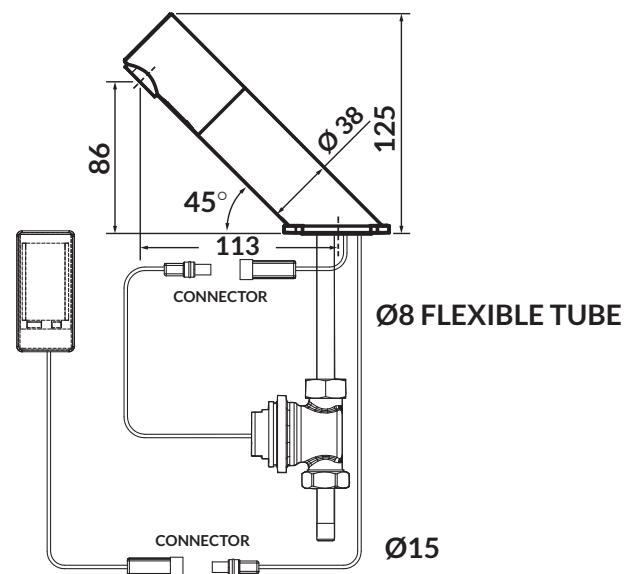

Technical Data

Operating Voltage	9V DC
Mains supply	230V AC 50Hz
Battery supply	9V PP3
Operating pressure	0.5 - 8.0 Bar
Max. water temperature	70° C
Sensor range	50 - 300mm (220mm preset)
Connection	15mm Compression