



Applications


Designed to cater for the varied automated flushing requirements of small and large urinal W.C installations

Features

- ~ Manufactured in the UK from high quality materials
- ~ Conforms to BS 1876
- ~ Available in 2 outlet sizes: 1" and 1½"
- ~ WRAS Approved
- ~ Inexpensive, trouble-free and simple to install
- ~ No moving parts - requires virtually no maintenance
- ~ Supplied complete with two rubber washers and nut
- ~ Each syphon is fully tested before leaving the factory



Dimensional Data

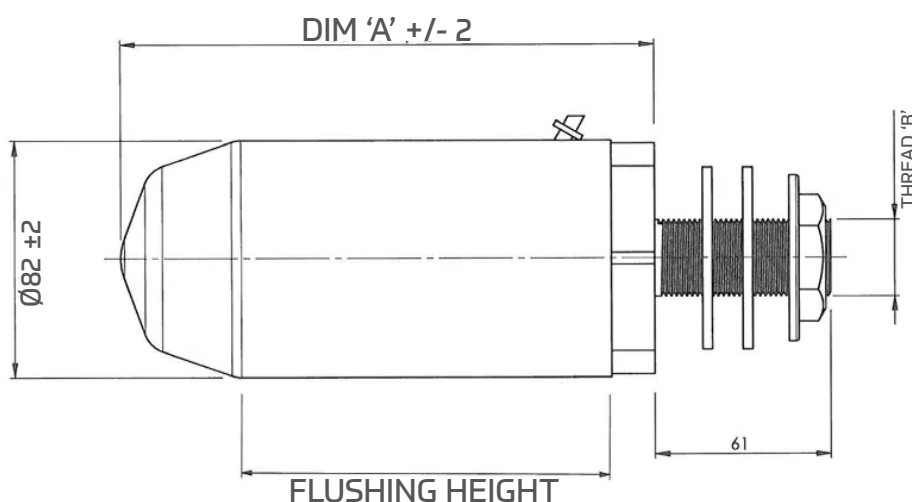

Size/Flushing Height

140mm (5½")	– 1" BSPT
140mm (5½")	– 1½" BSPT
159mm (6¼")	– 1" BSPT
159mm (6¼")	– 1½" BSPT
191mm (7½")	– 1" BSPT
191mm (7½")	– 1½" BSPT
210mm (8¾")	– 1" BSPT
210mm (8¾")	– 1½" BSPT
235mm (9¾")	– 1" BSPT
235mm (9¾")	– 1½" BSPT

Technical Data

Standard	BS 1876
Outlet	1" and 1½"
Flush Volume	4.5 Litre [1 gallon], 9 Litre [2 gallon], 13.5 Litre [3 gallon], 18 Litre [4 gallon] & 22.5 Litre [5 gallon]
Product Codes	364932, 364939, 364944, 364947, 364948, 364953, 364955, 364958, 364959, 364963