


Dudley



MINIFLO COMFORT HEIGHT
COMPACT CONCEALED PNEUMATIC CISTERN

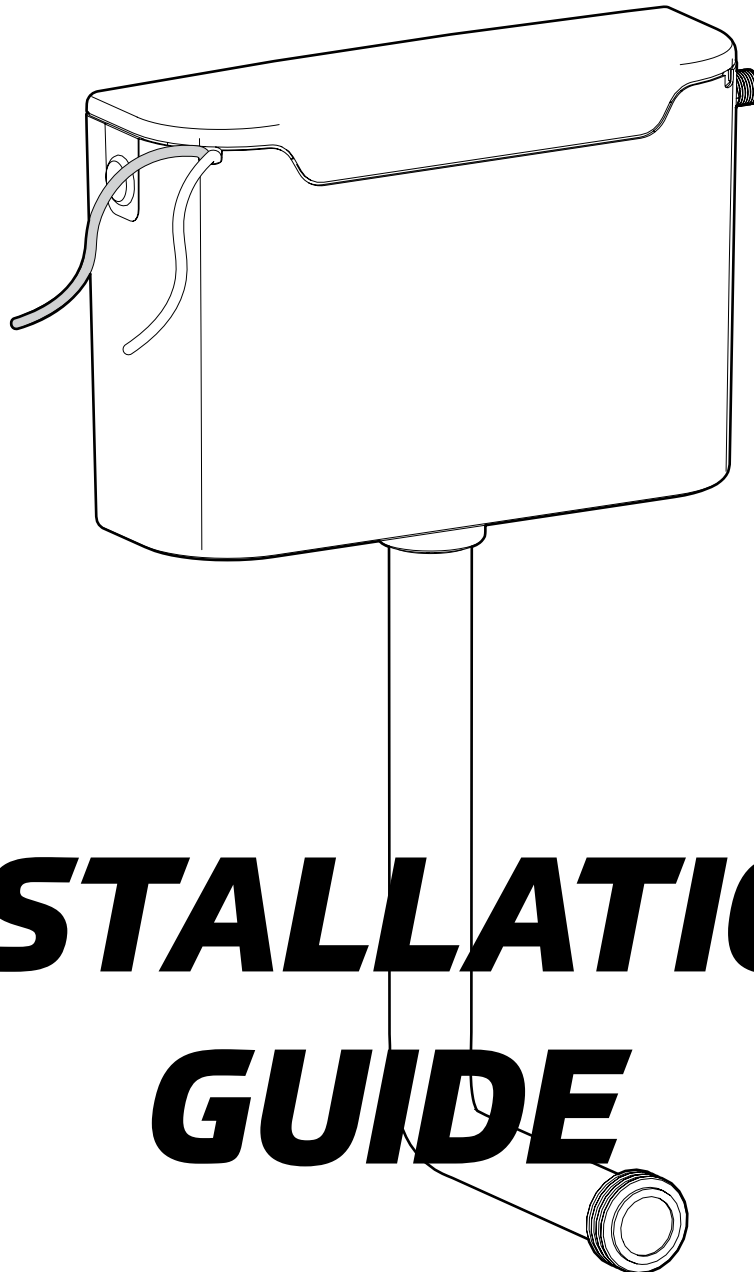

INSTALLATION GUIDE



T H O M A S
D U D L E Y




IMPORTANT NOTES

In addition to reference dimensions, allowance must be made for isolation valve, piping and button.


No sealing compound, paste, flux or solvent to be used in contact with plastic or rubber surfaces to avoid damage. Rubber washers will provide adequate seal. PTFE tape may be used on threads. Do not over tighten plastic nuts. No chemical block/additive to be used in this cistern.

Installation can be to masonry substrate or is transferable across other installation applications i.e. furniture. Ensure that suitable fixings are used for the required application.

1 REFERENCE DIMENSIONS WALL

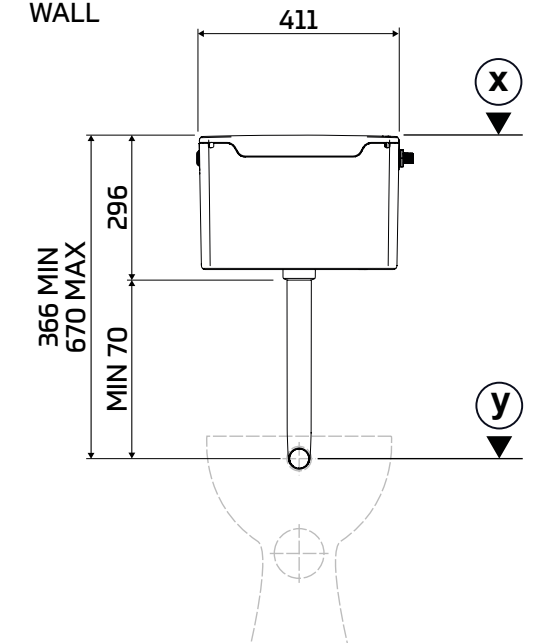


FURNITURE

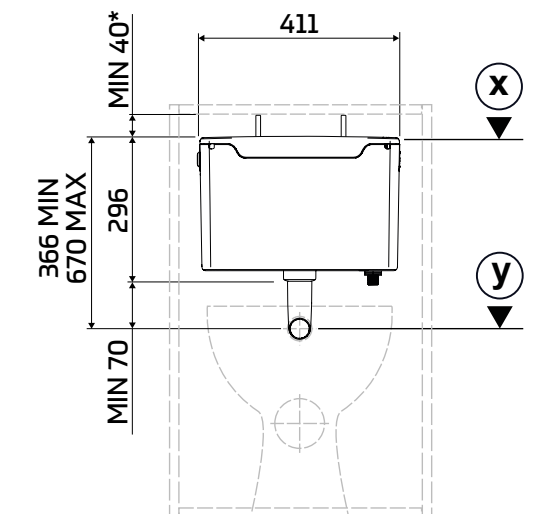


*MIN 40mm CLEARANCE
FOR FRONT ACCESS ONLY


1 REFERENCE DIMENSIONS CONTINUED

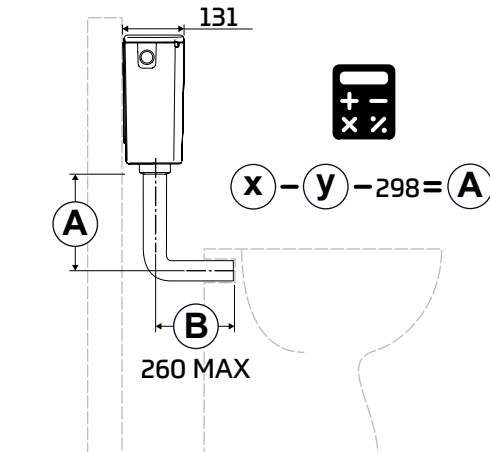

2 CONVERT TO LEFT HAND INLET (IF REQUIRED)

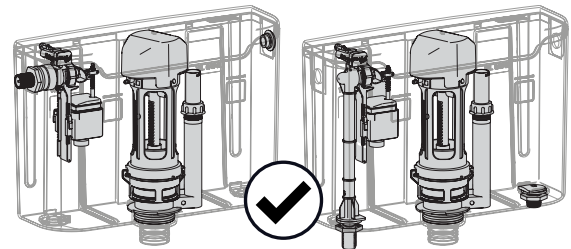

3

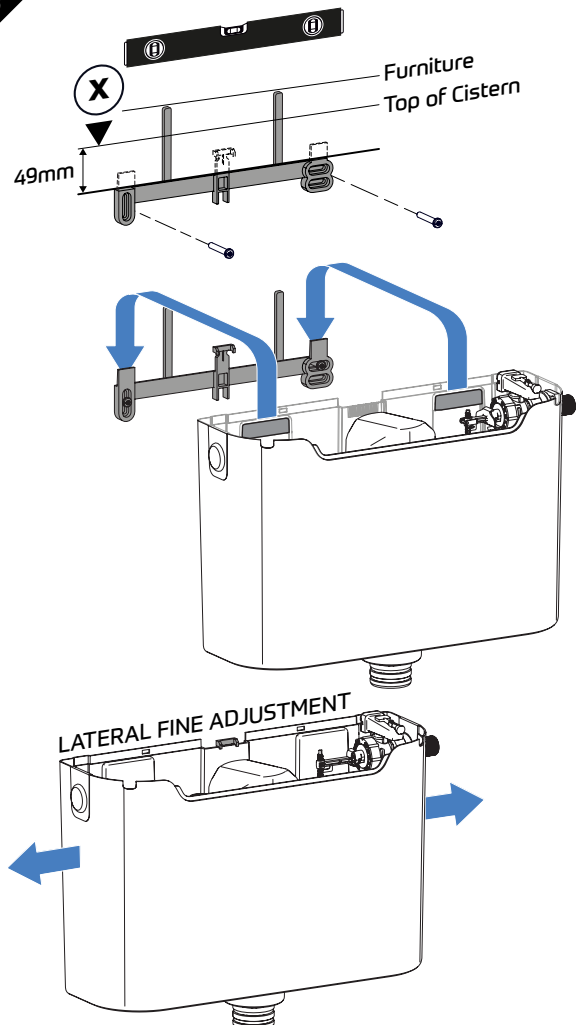


4

! MIN 70mm


A

B

! DEBURR




5

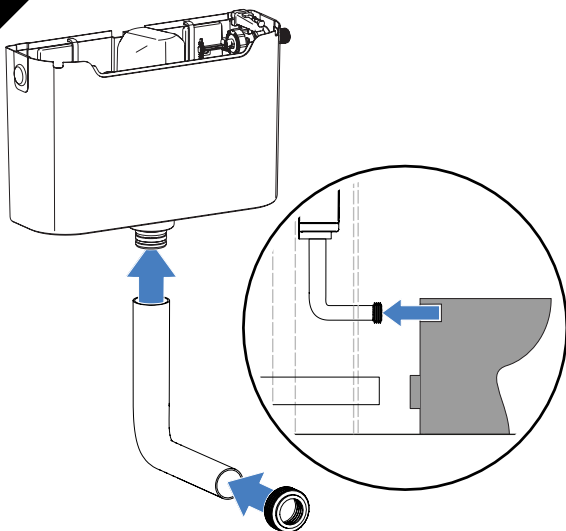


6

PARTIAL FLUSH VOLUME CONVERSION (IF REQUIRED)

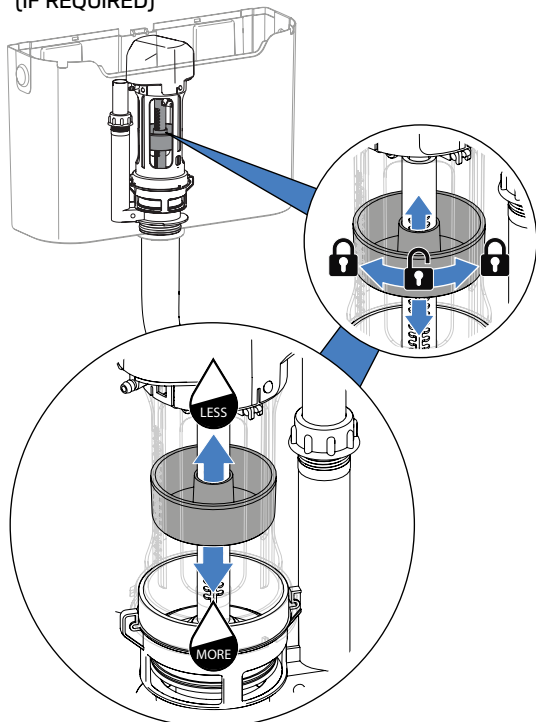


6

CONTINUED...




6L MONO

6/4L DUAL

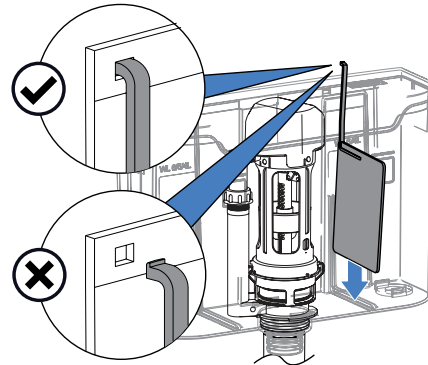

5L MONO


5/3L DUAL




4L MONO

4/2.6L DUAL


7

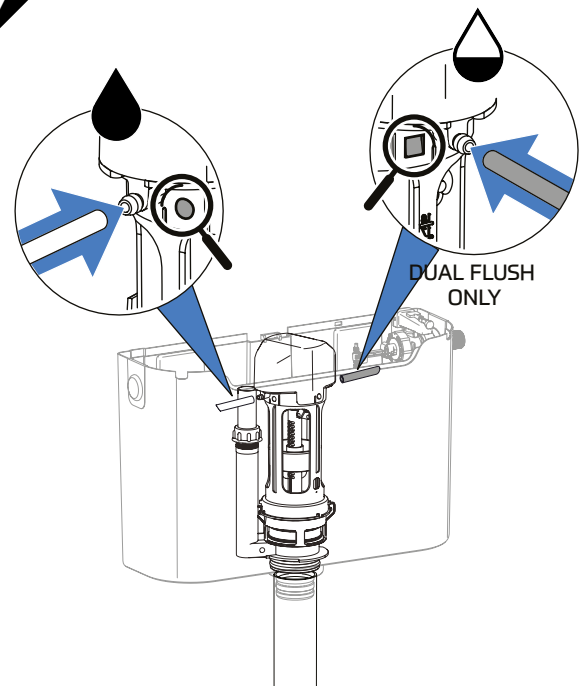


7 CONTINUED...

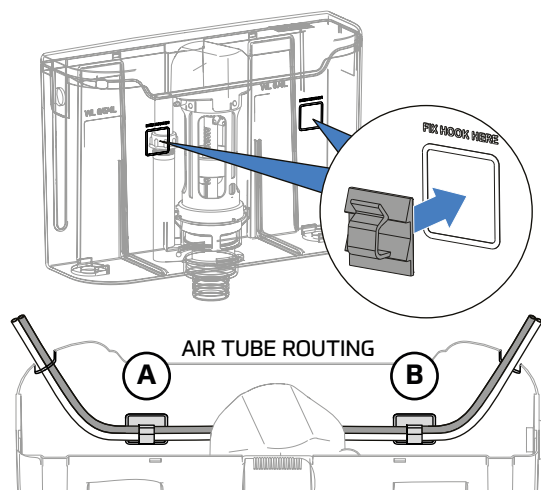

8

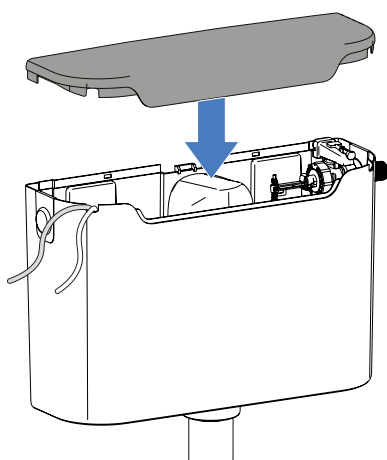


9

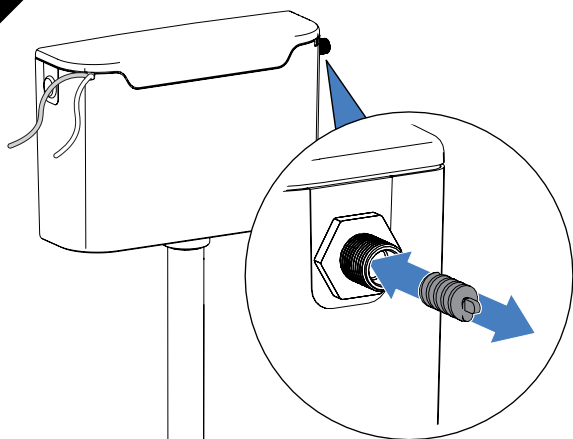

PRESSURE <1 bar	REMOVE RESTRICTOR
PRESSURE 1-3.5 bar	FIT RED RESTRICTOR
PRESSURE >3.5 bar	FIT WHITE RESTRICTOR

10 WATER LEVEL FINE ADJUST (IF REQUIRED)

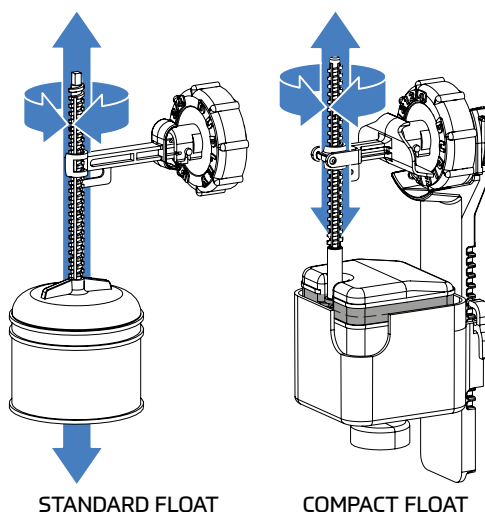

11

Final Installation Checklist

- ~ Check moving components are not obstructed and move freely.
- ~ Connect water supply.
- ~ Check connections are secure and fixed correctly.
- ~ Check installation for leaks.
- ~ Check water level aligns to that marked within cistern, fine adjust if necessary.
- ~ Hold the valve open (float down) to check overflow operation is sufficient.
- ~ If the valve fails to shut off, the diaphragm & filter may require cleaning. Please refer to the Hydroflo service & maintenance guide online.
- ~ Flush the cistern to check outlet valve operation.
- ~ Visit thomasdudley.co.uk/plumbing for service & maintenance information.

© 2026 TD_SISLF322499_11318 Iss M

Thomas Dudley
295 Birmingham New Road
Dudley, West Midlands
United Kingdom
DY1 4SJ

t +44 (0)121 557 5411
f +44 (0)121 557 5345
e info@thomasdudley.co.uk
w www.thomasdudley.co.uk/plumbing

T H O M A S
 D U D L E Y

TD