



BALL FLOATS

BS2456 Grade H floats
with brass thread inserts

Applications

Grade H spherical floats for use in systems occasionally exposed to temperatures of up to 93°C.


Fits part 1, 2 and 3 ball valves.

Features

- ~ Plastic construction
- ~ Spherical float
- ~ Brass thread insert
- ~ Grade H (Red)
- ~ Compliant to BS 2456



Dimensional Data

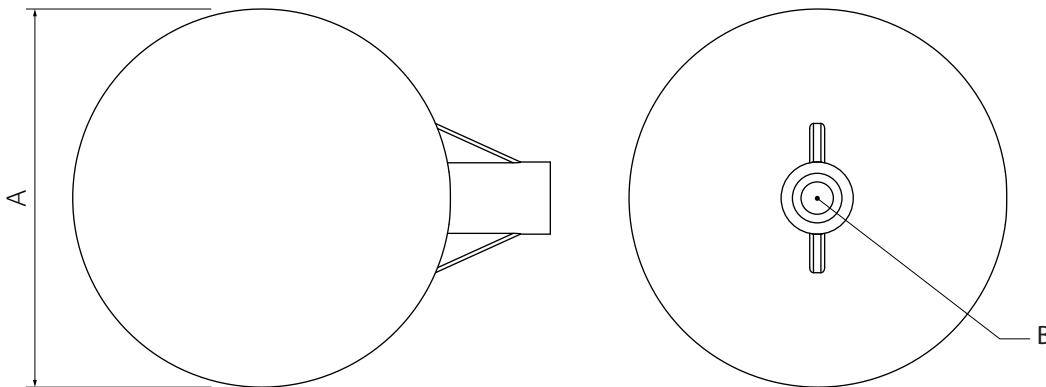

Technical Data

	(A) Diameter	(B) Thread Size	BS Type	Min. Lifting Effort
370209	114mm (4½")	5/16"	114 S	2.9 N
370211	127mm (5")	5/16"	127 S	4.2 N
370212	152mm (6")	5/16"	152 S-L	7.1 N