



Applications


Used for turning off the water from part of the system, avoiding the need to drain down the entire system in order to carry out maintenance work.

Features

- ~ Supplied with an easily identifiable red turn hand, this enables the water flow to be easily turned off or on by hand without any need for tools
- ~ For isolating part of the system, this avoids the need to drain down the whole system in order to carry out repairs
- ~ Manufactured from high quality materials



Dimensional Data

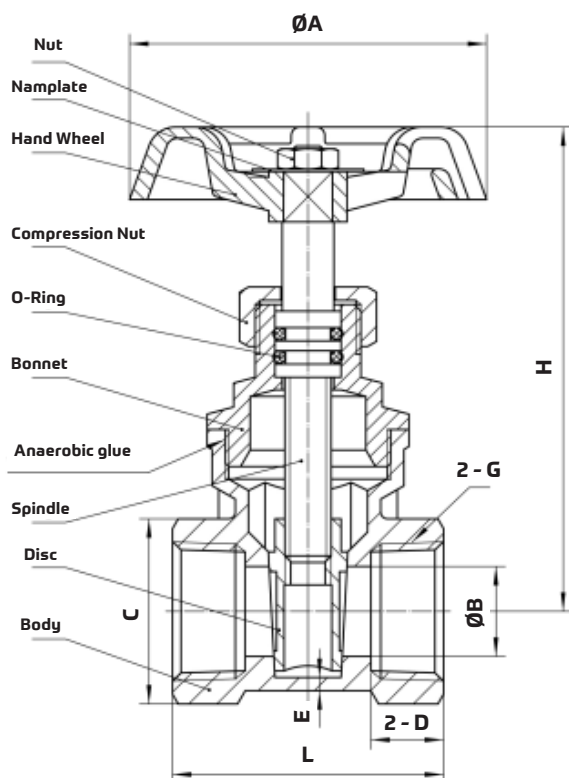

Technical Data

Size	A	B	C min	D min	E min	G	H	L	Weight
DN15	53±1	13	25	11	14	Rc1/2	66±2	39	207
DN20	59±1	15	30	11	14	Rc3/4	68±3	44	259
DN25	59±1	15	35	11	14	Rc1	83±4	48	358
DN32	72±1.5	18	40	15	1.8	Rc1.1/4	93±4	58	522
DN40	72±1.5	18	45	15	1.8	Rc1.1/2	103±5	68	654
DN50	78±2	38	55	16	1.8	Rc2	115±3	58	1007

Nominal Pressure	1.6 MPa
Strength Test Pressure	2.4 MPa (Water)
Seal Test Pressure	0.6 MPa (Air)
Applicable Medium	Water, non-corrosive liquid
Operating Temperature	-20 °C - 110 °C
Connection Standard	ISO 7-1
Test Standard	GB/T 13927-2008
Product Codes	1/2" - 364095 3/4" - 364097 1" - 364099 1.1/4" - 364101 1.1/2" - 364102 2" - 364103

