



Applications


Suitable for installation within custodial, healthcare and commercial environments.

Features

- ~ Damage resistant
- ~ Anti-ligature
- ~ Ideal for creating safe and secure cell environments
- ~ Suitable for use with direct flush controls or automatic urinal flushing with Kinetic®
- ~ It is important when using a direct flush system that a DC PipeInterrupter is fitted to comply with Water Regulations
- ~ Can be teamed with water-saving electronic urinal controls that support BREEAM and other initiative



Dimensional Data

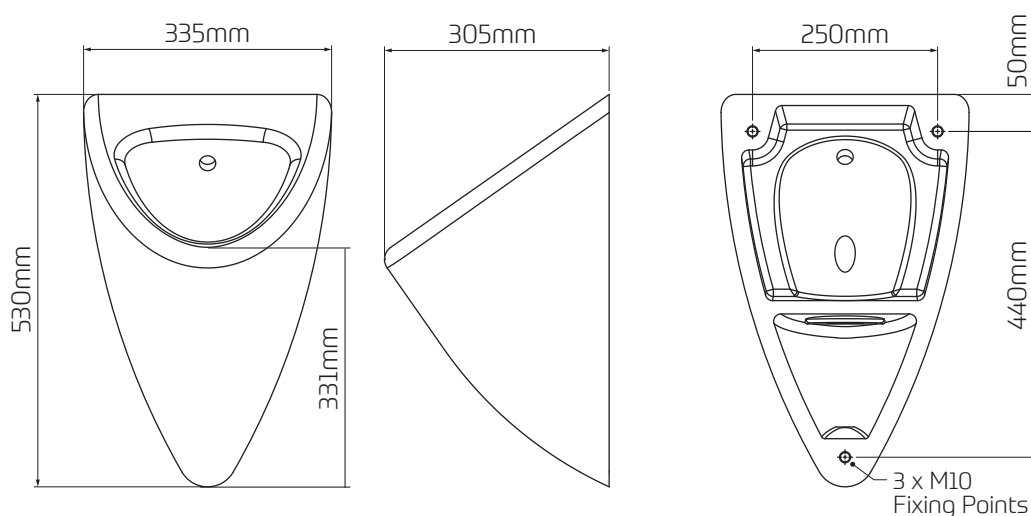

Technical Data

Material	Polymer Resin
Available Finishes	Matt, Gloss
Product Weight	17 kg
Fixing Orientation	Through Wall
Fixing Size	M10 fixing points
Standard Conformity	BS 476 Pt.6 Fire propagation & surface spread of flame. ISO EN 19712-3-2007 Rated 5 for durability, stain resistance, cigarette burns etc.
Product Code	325601